

STA-WARM offers one standard size column mounted CN dispensing pot 75 pounds capacity. The steel inner pot is equipped with a Stainless Steel needle stem and valve seat with standard diameter orifice of 1/16". Other diameter orifices up to 1/4" are available. Dispensing is accomplished through a heated valve which is hand, foot or solenoid operated. These units are readily adjustable to suitable height above the work by means of set screws located in the heavy boss which slides up and down the pipe column support. Four sizes of round pots through 100 pounds capacity are furnished for melting only. They have steel inner crucibles. For dimensions see drawing 26A1064-17B.

VOLTAGES

Pots are available in single Phase voltages of 120, 208 Or 240, 50 or 60 cycle

CONTROL

Accurate, variable dial thermostats are used calibrated 250-550°F or 100-300°F as specified



Bench Pot Type C75

PORTABLE DROPPER FOR FAST, EFFICIENT DISPENSING

Available in 1 pint, **STA-WARM** Portable Droppers are used for applying small amounts of alloy directly to the work, through the thumb controlled needle valve. The inner cup is either of spun mild or Stainless Steel, depending on whether inert oil or water is floated on top of the metal to prevent oxidation and dross. Special low wattage and variable temperature control are furnished for low temperature alloys in a range of 100-300°F. The standard diameter orifice is 1/8". Voltage is 120V, AC or DC 50 or 60 cycle.

Sta-Warm Electric Company

553 N. Chestnut St. ☐ Ravenna, OH ☐ 44266

Phone 888-782-9276 ☐ Fax 330-296-9243 E-mail info@sta-warm.com


Catalog #	Capacity	Mounting	Crucible	Wattage
C20	20	Bench Pot	Steel	330
C40	40	Bench Pot	Steel	600
C75	75	Bench Pot	Steel	880
C75CN	75	Column	Steel	880
C100	100	Bench Pot	Steel	880
C100SS	100	Bench Pot	Stainless Steel	880

Catalog #	Capacity	Mounting	Crucible	Wattage
C200	225	Leg (L) or Sling (S)	Steel	1450
C200SS	225	Leg (L) or Sling (S)	Stainless Steel	1450
*C400	400	Leg (L) or Sling (S)	Steel	2200
*C400SS	400	Leg (L) or Sling (S)	Stainless Steel	2200
*C600	600	Leg (L) or Sling (S)	Steel	2600
*C600SS	600	Leg (L) or Sling (S)	Stainless Steel	2600
*C800	800	Leg (L) or Sling (S)	Steel	3300
*C800SS	800	Leg (L) or Sling (S)	Stainless Steel	3300
*C1000	1000	Leg (L) or Sling (S)	Steel	4000
*C1000SS	1000	Leg (L) or Sling (S)	Stainless Steel	4000

+Capacity and wattage based on CERROBEND®; can vary slightly with other alloys.

* Available in 240/3/60 or 480/3/60

® Registered trademark of Cerro Sales Corporation

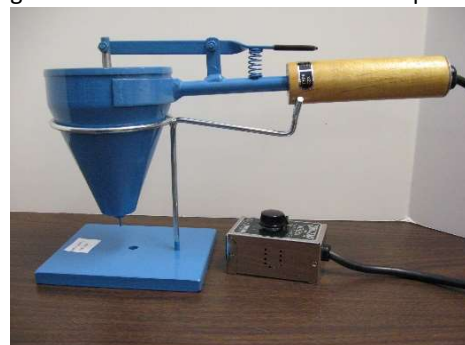

Model C2X 1 Pint Dropper